

Looking for a high-tech controller for your office?



8 DOOR CONTROLLER



www.starlinkindia.com

Introduction

Door Access Control System & Door Control System is an extremely economical option for access control every user access can be control door wise, time wise and Anti Pass Back(APB) can also be enabled for critical zones.

Small sleek readers are fitted on each door along with EM lock. One controller can control 8 doors and upto 15000 users for higher doors multiple controller can be installed.

Star Link Access control software simplifies management of access and generate various reports Door wise & User wise. Attendance report can also be generated with the help of Star Link Time Office Software.

Features

- Processor - 32 bit RISC microcontroller
- 2MB Flash with data storage of 62500 records
- No. of doors control - 8/4
- No. of readers connected - 15/8
- Dimension - 21cm x 14cm x 5cm
- Piezo-electric buzzer for acceptance/rejection indication
- Lock to controller distance - depends on wire resistance
- Multiple time zone to restrict access time wise
- EM/Mifare Slave Reader to entry & exit

Specifications

- Processor : 32 Bit RISC Micro-Controller.
- 2 Mega-Byte Flash with data storage of 62,500 Records with 8 digits alpha numeric user ID.
- Memory card support up to 1 GB for data transfer or data storage. Card Enrollment 15000 records
- 16*2 Character alpha-numeric Backlit LCD with window area 15*65 mm.
- LCD display DD-MM-YYYY, day of the week and HH:MM:SS time format.
- Time Keeping : Build in 24 hours Quartz real time clock.
- Power display : 12V DC


- Screw Connector Strip make connection easy and reliable.
 - Piezo electric buzzer for accept and reject audio indication.
 - Number of Doors Control : 8
 - Numbers of Readers Connected : 16
 - Multiple Access Group to restrict access area wise.
 - Multiple Switch zone to restrict access Time wise.
 - Manual switch Options in place of out reader.
 - Door sensor option for door open time monitor.
 - Lock to controller distance : Depend on wire resistance
- Works on AC input voltage 180-260 volts 50Hz
- Operating Temperature 5 -5 Degree Celsius.
 - Humidity 10-90 % Non – Condensing.

Access Control

- Access Control is installed in office premises to restrict the unwanted movements. Access Control Systems are made up of three important mechanisms: a controller, the locks and the access device. It can be used as the access device for successful operation. It also generates “IN and OUT” report for maintenance of records.



Service & Support

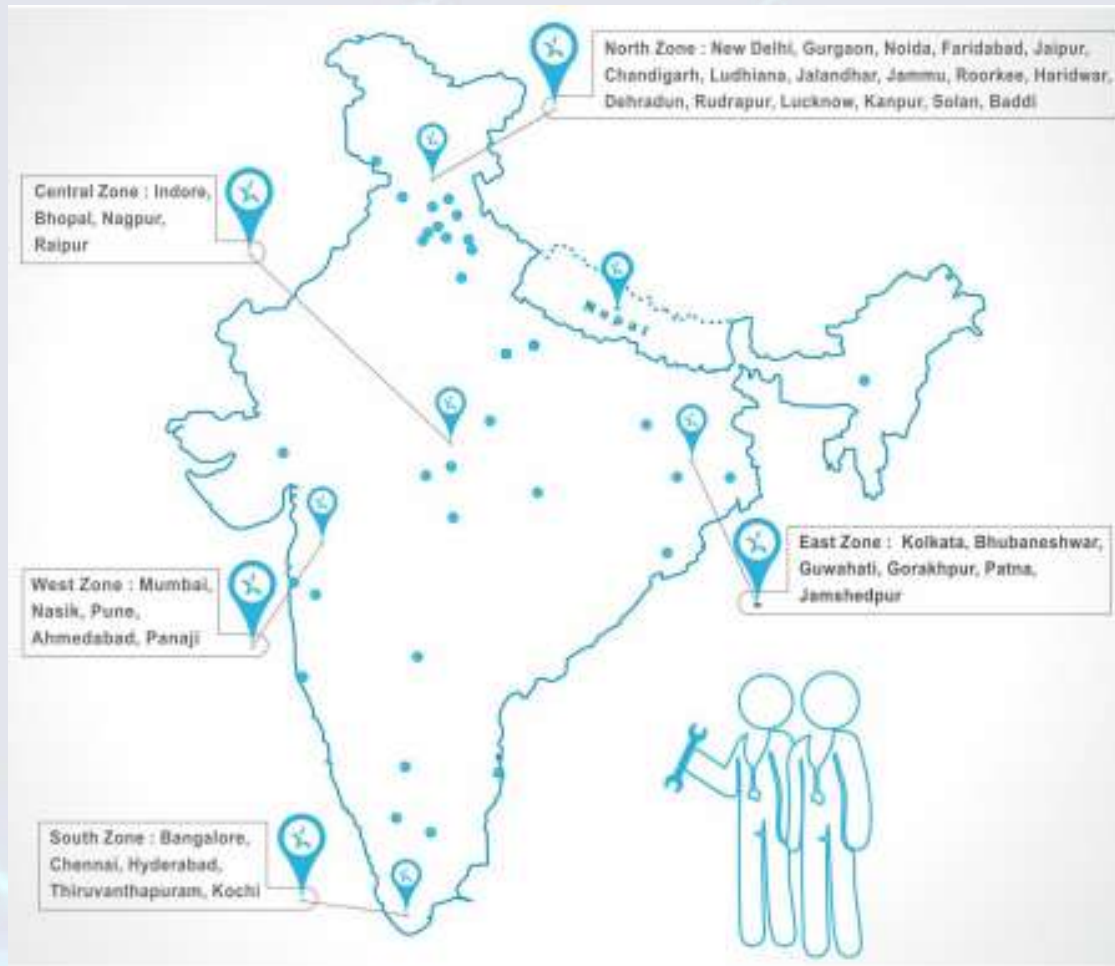

For Any Biometric Needs

Contact US:-

Star Link Communication Pvt Ltd

D-88/4, Okhla Phase I, Okhla Industrial Area, New
Delhi-110020

Phone: 011 4059 8888(100 Lines)

Email: sales@starlinkindia.com

Toll Free No. 1800-11-8088

Thank you...